


Bold on Twist joints - Stabilizer and Hook on Bars

BOLD ON TWIST JOINTS


Eurotruss supplies prefixed bold on twist joints which can be used as a T-connection. The sizes do match with standard T-joints in standard rigs and ground supported rigs. The slim line version has the advantage that it requires less mounting space as sometimes the braces of the attached truss can be in the way.

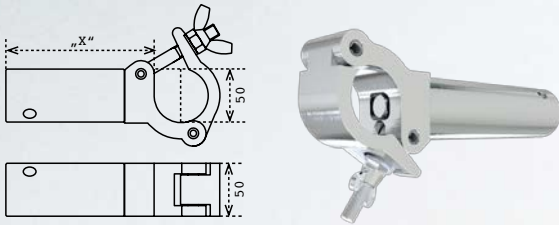

FD/HD Bold on Twist Joint

Productcode	Length	To make
CS1-DC10	100 mm.	T-joint i.c.w HD44 Corners
CS1-DC10,5	105 mm.	T-joint i.c.w FD/HD34 Corners
CS1-DC12	120 mm.	T-joint i.c.w FD/HD34 Sleeve Block
CS1-DC14	140 mm.	T-joint i.c.w HD44 Sleeve Block
CS1-DC21	210 mm.	T-joint i.c.w FD/HD34 Corners

If you want these equipped with Slim Line Coupler (Clamp) add Code S like CS1-DC021S

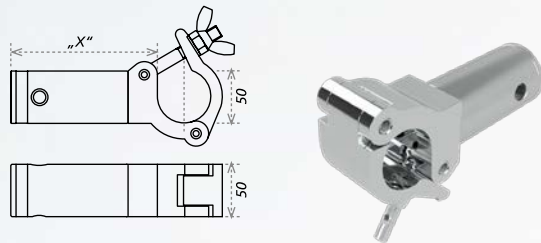


XD Bold on Twist Joint

Productcode	Length	To make
CS2-DC13	130 mm.	T-joint i.c.w XD Sleeve Blocks
CS2-DC21	210 mm.	T-joint i.c.w. XD Corners


STABILIZERS AND HOOK ON BARS

Bold on Corner braces are available in various lengths and required in the Ground Supports and Rigs which exceeds a height of 6m. The hookonbar is available in various lengths and with various wall thicknesses.

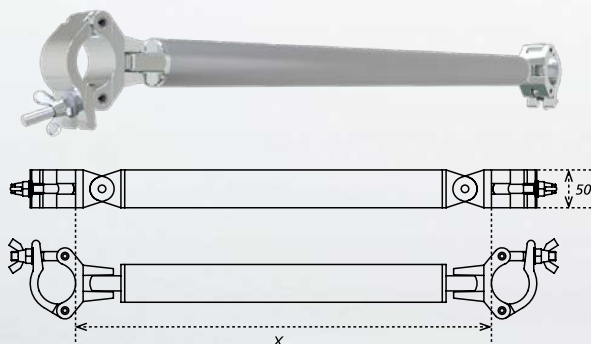

Bold on Corner Brace

Productcode	Length	Description
KCKC-70	70 cm.	Bold on Corner Brace 70 cm.
KCKC-140	140 cm.	Bold on Corner Brace 140 cm.
KCKC-200	200 cm.	Bold on Corner Brace 200 cm.
KCKC-300	300 cm.	Bold on Corner Brace 300 cm.

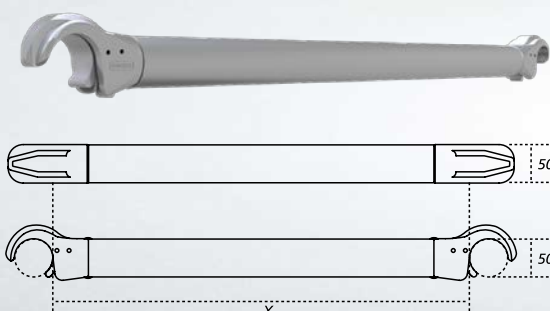

Hook on Bar

Productcode	Length	Description
HCHC-100	100 cm.	Hook on Bar 100 cm.
HCHC-200	200 cm.	Hook on Bar 200 cm.
HCHC-300	300 cm.	Hook on Bar 300 cm.